

MELSOFT Library Q68DA Reference Manual

<CONTENTS>

Reference Manual Revision History	2
1. M+Q68DA_WriteDAVal (DA conversion data write)	3
2. M+Q68DA_WriteAllDAVal (DA conversion data write (All CHs))	7
3. M+Q68DA_SetDAConversion (DA conversion enable/disable setting).....	11
4. M+Q68DA_SetDAOutput (DA output enable/disable setting)	15
5. M+Q68DA_RequestSetting (Operating condition setting request operation).....	19
6. M+Q68DA_SetOffsetVal (Offset setting)	23
7. M+Q68DA_SetGainVal (Gain setting).....	28
8. M+Q68DA_ErrorOperation (Error operation)	33
Appendix 1 - Application examples	37

Reference Manual Revision History

Reference Manual Number	Date	Description
FBM-M043-A	2010/12/10	First edition

1. M+Q68DA_WriteDAVal (DA conversion data write)

FB Name

M+Q68DA_WriteDAVal

Function Overview

Item	Description																				
Function overview	Writes DA conversion data of a specified channel.																				
Symbol	<table><tr><td colspan="4">M+Q68DA_WriteDAVal</td></tr><tr><td>Execution command</td><td>B : FB_EN</td><td>FB_ENO : B</td><td>Execution status</td></tr><tr><td>Module start XY address</td><td>W : i_Start_IO_No</td><td>FB_OK : B</td><td>Completed without error</td></tr><tr><td>Channel No.</td><td>W : i_CH</td><td>FB_ERROR : B</td><td>Error flag</td></tr><tr><td>Digital value</td><td>W : i_DA_Value</td><td>ERROR_ID : W</td><td>Error code</td></tr></table>	M+Q68DA_WriteDAVal				Execution command	B : FB_EN	FB_ENO : B	Execution status	Module start XY address	W : i_Start_IO_No	FB_OK : B	Completed without error	Channel No.	W : i_CH	FB_ERROR : B	Error flag	Digital value	W : i_DA_Value	ERROR_ID : W	Error code
M+Q68DA_WriteDAVal																					
Execution command	B : FB_EN	FB_ENO : B	Execution status																		
Module start XY address	W : i_Start_IO_No	FB_OK : B	Completed without error																		
Channel No.	W : i_CH	FB_ERROR : B	Error flag																		
Digital value	W : i_DA_Value	ERROR_ID : W	Error code																		
Applicable hardware and software	Compatible hardware: Q68DAV, Q68DAVN, Q68DAI, Q68DAIN																				
	Hardware details																				
	<table><tr><td rowspan="2">Q series</td><td>High performance model</td></tr><tr><td>Universal model</td></tr></table>	Q series	High performance model	Universal model																	
	Q series		High performance model																		
		Universal model																			
*Not applicable for QCPU (A mode)																					
Compatible software: GX Works 2 Version 1.31H or later																					
Programming language	Ladder																				
Number of steps (maximum value)	<p>For universal model CPU: 184*</p> <p>*The value is the number of steps in the label program, and is therefore stated as a reference value. For details, refer to the GX Works2 Version1 Operation Manual (Simple Project).</p>																				
Function description	<p>1) By turning ON FB_EN (Execution command), DA conversion data is written to the specified channel.</p> <p>2) The DA conversion data to be written depends on the resolution mode setting.</p> <p>3) When the input value is invalid, the FB_ERROR output turns ON, processing is interrupted, and the error code is stored in ERROR_ID (Error code). Refer to the error code explanation section for details.</p>																				
Compiling method	Macro type																				

Item	Description
Restrictions and precautions	<p>1) The FB does not include error recovery processing. Program the error recovery processing separately in accordance with the required system operation.</p> <p>2) The FB cannot be used in an interrupt program.</p> <p>3) Please ensure that the FB_EN signal is capable of being turned OFF by the program. Do not use this FB in programs that are only executed once such as a subroutine, FOR-NEXT loop, etc. because it is impossible to turn OFF.</p> <p>4) When two or more of these FBs are used, precaution must be taken to avoid repetition of the target channel.</p> <p>5) This FB uses index registers Z9, Z8 and Z7. Please do not use these index registers in an interrupt program.</p> <p>6) Every input must be provided with a value for proper FB operation.</p> <p>7) If the auto refresh is set using GX Configurator-DA or the configuration function of GX Works 2, using this FB is unnecessary.</p> <p>8) The output range, synchronous output mode, resolution mode, and operation mode must be configured to match devices and systems connected to the Q68DA module. Configure these settings by making the GX Works2 switch setting according to the application.</p> <p>For details on how to use the intelligent function module switch setting, refer to GX Works2 Operating Manual (Common).</p>
FB operation type	Real-time execution
Application example	Refer to Appendix 1 - Application examples.
Timing chart	<div> <div>[When operation completes without error]</div> </div> <div> <div>[When an error occurs]</div> </div>
Relevant manual	Digital-Analog Converter Module User's Manual

Error codes

■ Error code list

Error code	Description
10 (Decimal)	The specified target channel is not valid. The target channel is not within the range of the number of channels of the mounted module.. Please try again after confirming the setting.

Labels

■ Input labels

Name	Label name	Data type	Setting range	Description
Execution command	FB_EN	B	ON, OFF	ON: The FB is activated. OFF: The FB is not activated.
Module start XY address	i_Start_IO_No	W	Depends on the I/O point range. For details, refer to the CPU user's manual.	Specify the starting XY address (in hexadecimal) where the Q68DA module is mounted. (For example, enter H10 for X10.)
Channel No.	i_CH	W	1~8	Specify the channel number.
Digital value	i_DA_Value	W	Depends on the output range setting and resolution setting of the specified channel.	For details on the setting range of the digital value, refer to the relevant manual.

■ Output labels

Name	Label name	Data type	Initial value	Description
Execution status	FB_ENO	B	OFF	ON: Execution command is ON OFF: Execution command is OFF.
Completed without error	FB_OK	B	OFF	When ON, it indicates that DA conversion value is being written.
Error flag	FB_ERROR	B	OFF	When ON, it indicates that an error has occurred.
Error code	ERROR_ID	W	0	FB error code output.

FB Version Upgrade History

Version	Date	Description
1.00A	2010/12/10	First edition

Note

This chapter includes information related to the M+Q68DA_WriteDAVal function block.

It does not include information on restrictions of use such as combination with digital-analog converter modules or programmable controller CPUs.

Before using any Mitsubishi products, please read all the relevant manuals.

2. M+Q68DA_WriteAllDAVal (DA conversion data write (All CHs))

FB Name
M+Q68DA_WriteAllDAVal

Function Overview

Item	Description	
Function overview	Writes DA conversion data of all channels.	
Symbol	<div><div><div>M+Q68DA_WriteAllDAVal</div><div><div><div>Execution command</div><div>B : FB_EN</div></div><div><div>Module start XY address</div><div>W : i_Start_IO_No</div></div><div><div>Channel 1 digital value</div><div>W : i_DA_ValueCH1</div></div><div><div>Channel 2 digital value</div><div>W : i_DA_ValueCH2</div></div><div><div>Channel 3 digital value</div><div>W : i_DA_ValueCH3</div></div><div><div>Channel 4 digital value</div><div>W : i_DA_ValueCH4</div></div><div><div>Channel 5 digital value</div><div>W : i_DA_ValueCH5</div></div><div><div>Channel 6 digital value</div><div>W : i_DA_ValueCH6</div></div><div><div>Channel 7 digital value</div><div>W : i_DA_ValueCH7</div></div><div><div>Channel 8 digital value</div><div>W : i_DA_ValueCH8</div></div></div><div><div><div>FB_ENO : B</div><div>Execution status</div></div><div><div>FB_OK : B</div><div>Completed without error</div></div><div><div>FB_ERROR : B</div><div>Error flag</div></div><div><div>ERROR_ID : W</div><div>Error code</div></div></div></div></div>	
Applicable hardware and software	Compatible hardware: Q68DAV, Q68DAVN, Q68DAI, Q68DAIN	
	Hardware details	
	<div><div>Q series</div><div><div>High performance model</div><div>Universal model</div></div></div>	
	*Not applicable for QCPU (A mode)	
	Compatible software: GX Works 2 Version 1.31H or later	
Programming language	Ladder	
Number of steps (maximum value)	<div>For universal model CPU: 184*</div> <div>*The value is the number of steps in the label program, and is therefore stated as a reference value. For details, refer to the GX Works2 Version1 Operation Manual (Simple Project).</div>	

Item	Description
Function description	<p>1) By turning ON FB_EN (Execution command), DA conversion data is written to the all channels.</p> <p>2) The DA conversion data to be written to the all channels depends on the resolution mode setting.</p>
Compiling method	Macro type
Restrictions and precautions	<p>1) The FB does not include error recovery processing. Program the error recovery processing separately in accordance with the required system operation.</p> <p>2) The FB cannot be used in an interrupt program.</p> <p>3) Please ensure that the FB_EN signal is capable of being turned OFF by the program. Do not use this FB in programs that are only executed once such as a subroutine, FOR-NEXT loop, etc. because it is impossible to turn OFF.</p> <p>4) When two or more of these FBs are used, precaution must be taken to avoid repetition of the target channel.</p> <p>5) This FB uses index registers Z9 and Z8. Please do not use these index registers in an interrupt program.</p> <p>6) Every input must be provided with a value for proper FB operation.</p> <p>7) If the auto refresh is set using GX Configurator-DA or the configuration function of GX Works 2, using this FB is unnecessary.</p> <p>8) The output range, synchronous output mode, resolution mode, and operation mode must be configured to match devices and systems connected to the Q68DA module. Configure these settings by making the GX Works2 switch setting according to the application.</p> <p>For details on how to use the intelligent function module switch setting, refer to GX Works2 Operating Manual (Common).</p>
FB operation type	Real-time execution
Application example	Refer to Appendix 1 - Application examples.
Timing chart	<p>The timing chart illustrates the sequence of events for the DA conversion function block. It shows the relationship between several signals over time:</p> <ul style="list-style-type: none"> FB_EN (Execution command): A pulse that initiates the refreshing process. FB_ENO (Execution status): Active (high) during the refreshing period. CH digital input value (Un*G1 to 8): The input values are sampled during the refreshing period. Refreshing: The period during which the DA conversion data is being written to the channels. Refreshing stop: The period after the refreshing process is complete. FB_OK (Completed without error): Active (high) after the refreshing period. FB_ERR (Error): Active (high) if an error occurs during the refreshing period. ERROR_ID (Error code): The error code is output during the FB_ERR period.
Relevant manual	Digital-Analog Converter Module User's Manual

Error codes

■ Error code list

Error code	Description
None	No errors are stored for this FB.

Labels

■ Input labels

Name	Label name	Data type	Setting range	Description
Execution command	FB_EN	B	ON, OFF	ON: The FB is activated. OFF: The FB is not activated.
Module start XY address	i_Start_IO_No	W	Depends on the I/O point range. For details, refer to the CPU user's manual.	Specify the starting XY address (in hexadecimal) where the Q68DA module is mounted. (For example, enter H10 for X10.)
Channel 1 digital value	i_DA_ValueCH1	W	Depends on the output range setting and resolution setting of the channel 1.	Writes the digital conversion value of the channel 1.
Channel 2 digital value	i_DA_ValueCH2	W	Depends on the output range setting and resolution setting of the channel 2.	Writes the digital conversion value of the channel 2.
Channel 3 digital value	i_DA_ValueCH3	W	Depends on the output range setting and resolution setting of the channel 3.	Writes the digital conversion value of the channel 3.
Channel 4 digital value	i_DA_ValueCH4	W	Depends on the output range setting and resolution setting of the channel 4.	Writes the digital conversion value of the channel 4.
Channel 5 digital value	i_DA_ValueCH5	W	Depends on the output range setting and resolution setting of the channel 5.	Writes the digital conversion value of the channel 5.
Channel 6 digital value	i_DA_ValueCH6	W	Depends on the output range setting and resolution setting of the channel 6.	Writes the digital conversion value of the channel 6.

Name	Label name	Data type	Setting range	Description
Channel 7 digital value	i_DA_ValueCH7	W	Depends on the output range setting and resolution setting of the channel 7.	Writes the digital conversion value of the channel 7.
Channel 8 digital value	i_DA_ValueCH8	W	Depends on the output range setting and resolution setting of the channel 8.	Writes the digital conversion value of the channel 8.

■ Output labels

Name	Label name	Data type	Initial value	Description
Execution status	FB_ENO	B	OFF	ON: Execution command is ON. OFF: Execution command is OFF.
Completed without error	FB_OK	B	OFF	When ON, it indicates that DA conversion values of all channels are being written.
Error flag	FB_ERROR	B	OFF	When ON, it indicates that an error has occurred.
Error code	ERROR_ID	W	0	FB error code output.

FB Version Upgrade History

Version	Date	Description
1.00A	2010/12/10	First edition

Note

This chapter includes information related to the M+Q68DA_WriteAllDAVal function block.

It does not include information on restrictions of use such as combination with digital-analog converter modules or programmable controller CPUs.

Before using any Mitsubishi products, please read all the relevant manuals.

3. M+Q68DA_SetDAConversion (DA conversion enable/disable setting)

FB Name
M+Q68DA_SetDAConversion

Function Overview

Item	Description																							
Function overview	Sets the DA conversion enable/disable setting of a specified channel or all channels.																							
Symbol	<table><tr><td colspan="4">M+Q68DA_SetDAConversion</td></tr><tr><td>Execution command</td><td>B : FB_EN</td><td>FB_ENO : B</td><td>Execution status</td></tr><tr><td>Module start XY address</td><td>W : i_Start_IO_No</td><td>FB_OK : B</td><td>Completed without error</td></tr><tr><td>Channel No.</td><td>W : i_CH</td><td>FB_ERROR : B</td><td>Error flag</td></tr><tr><td>DA conversion enable/disable setting</td><td>B : i_DA_Enable</td><td>ERROR_ID : W</td><td>Error code</td></tr></table>				M+Q68DA_SetDAConversion				Execution command	B : FB_EN	FB_ENO : B	Execution status	Module start XY address	W : i_Start_IO_No	FB_OK : B	Completed without error	Channel No.	W : i_CH	FB_ERROR : B	Error flag	DA conversion enable/disable setting	B : i_DA_Enable	ERROR_ID : W	Error code
M+Q68DA_SetDAConversion																								
Execution command	B : FB_EN	FB_ENO : B	Execution status																					
Module start XY address	W : i_Start_IO_No	FB_OK : B	Completed without error																					
Channel No.	W : i_CH	FB_ERROR : B	Error flag																					
DA conversion enable/disable setting	B : i_DA_Enable	ERROR_ID : W	Error code																					
Applicable hardware and software	Compatible hardware: Q68DAV, Q68DAVN, Q68DAI, Q68DAIN																							
	Hardware details																							
	Q series		High performance model																					
			Universal model																					
	*Not applicable for QCPU (A mode)																							
Compatible software: GX Works 2 Version 1.31H or later																								
Programming language	Ladder																							
Number of steps (maximum value)	For universal model CPU: 223* *The value is the number of steps in the label program, and is therefore stated as a reference value. For details, refer to the GX Works2 Version1 Operation Manual (Simple Project).																							
Function description	1) By turning ON FB_EN (Execution command), DA conversion enable/disable setting of the specified channel is set. 2) FB operation is one-shot only, triggered by the FB_EN signal. 3) The setting value is enabled by turning ON the operating condition setting request signal (Y9) or by executing the operating condition setting request FB (M+Q68DA_RequestSetting). 4) When the input value is invalid, the FB_ERROR output turns ON, processing is interrupted, and the error code is stored in ERROR_ID (Error code). Refer to the error code explanation section for details.																							

Item	Description
Compiling method	Macro type
Restrictions and precautions	<p>1) The FB does not include error recovery processing. Program the error recovery processing separately in accordance with the required system operation.</p> <p>2) The FB cannot be used in an interrupt program.</p> <p>3) Please ensure that the FB_EN signal is capable of being turned OFF by the program. Do not use this FB in programs that are only executed once such as a subroutine, FOR-NEXT loop, etc. because it is impossible to turn OFF.</p> <p>4) When two or more of these FBs are used, precaution must be taken to avoid repetition of the target channel.</p> <p>5) This FB uses index registers Z9, Z8 and Z7. Please do not use these index registers in an interrupt program.</p> <p>6) Every input must be provided with a value for proper FB operation.</p> <p>7) If the auto refresh is set using GX Configurator-DA or the configuration function of GX Works 2, using this FB is unnecessary.</p> <p>8) The output range, synchronous output mode, resolution mode, and operation mode must be configured to match devices and systems connected to the Q68DA module. Configure these settings by making the GX Works2 switch setting according to the application.</p> <p>For details on how to use the intelligent function module switch setting, refer to GX Works2 Operating Manual (Common).</p>
FB operation type	Pulsed execution (1 scan execution type)
Application example	Refer to Appendix 1 - Application examples.
Timing chart	<div> <p>[When operation completes without error]</p> </div> <div> <p>[When an error occurs]</p> </div>
Relevant manual	Digital-Analog Converter Module User's Manual

Error codes

■ Error code list

Error code	Description
10 (Decimal)	The specified target channel is not valid. The target channel is not within the range of the number of channels of the mounted module.. Please try again after confirming the setting.

Labels

■ Input labels

Name	Label name	Data type	Setting range	Description
Execution command	FB_EN	B	ON, OFF	ON: The FB is activated. OFF: The FB is not activated.
Module start XY address	i_Start_IO_No	W	Depends on the I/O point range. For details, refer to the CPU user's manual.	Specify the starting XY address (in hexadecimal) where the Q68DA module is mounted. (For example, enter H10 for X10.)
Channel No.	i_CH	W	As shown on the right.	Specify the channel number. ■Q68DAV,Q68DAVN,Q68DAI, Q68DAIN: 1~8 ■All channels at once: 15(0FH)
DA conversion enable/disable setting	i_DA_Enable	B	ON, OFF	ON: DA conversion enabled. OFF: DA conversion disabled.

■ Output labels

Name	Label name	Data type	Initial value	Description
Execution status	FB_ENO	B	OFF	ON: Execution command is ON. OFF: Execution command is OFF.
Completed without error	FB_OK	B	OFF	When ON, it indicates that DA conversion enable/disable setting is completed.
Error flag	FB_ERROR	B	OFF	When ON, it indicates that an error has occurred.
Error code	ERROR_ID	W	0	FB error code output.

FB Version Upgrade History

Version	Date	Description
1.00A	2010/12/10	First edition

Note

This chapter includes information related to the M+Q68DA_SetDAConversion function block.

It does not include information on restrictions of use such as combination with digital-analog converter modules or programmable controller CPUs.

Before using any Mitsubishi products, please read all the relevant manuals.

4. M+Q68DA_SetDAOutput (DA output enable/disable setting)

FB Name
M+Q68DA_SetDAOutput

Function Overview

Item	Description																				
Function overview	Sets the DA output enable/disable setting of a specified channel or all channels.																				
Symbol	<table><tr><td colspan="4">M+Q68DA_SetDAOOutput</td></tr><tr><td>Execution command</td><td>B : FB_EN</td><td>FB_ENO : B</td><td>Execution status</td></tr><tr><td>Module start XY address</td><td>W : i_Start_IO_No</td><td>FB_OK : B</td><td>Completed without error</td></tr><tr><td>Channel No.</td><td>W : i_CH</td><td>FB_ERROR : B</td><td>Error flag</td></tr><tr><td>DA output enable/disable setting</td><td>B : i_DA_Out_Enable</td><td>ERROR_ID : W</td><td>Error code</td></tr></table>	M+Q68DA_SetDAOOutput				Execution command	B : FB_EN	FB_ENO : B	Execution status	Module start XY address	W : i_Start_IO_No	FB_OK : B	Completed without error	Channel No.	W : i_CH	FB_ERROR : B	Error flag	DA output enable/disable setting	B : i_DA_Out_Enable	ERROR_ID : W	Error code
M+Q68DA_SetDAOOutput																					
Execution command	B : FB_EN	FB_ENO : B	Execution status																		
Module start XY address	W : i_Start_IO_No	FB_OK : B	Completed without error																		
Channel No.	W : i_CH	FB_ERROR : B	Error flag																		
DA output enable/disable setting	B : i_DA_Out_Enable	ERROR_ID : W	Error code																		
Applicable hardware and software	Compatible hardware: Q68DAV, Q68DAVN, Q68DAI, Q68DAIN																				
	Hardware details																				
	<table><tr><td rowspan="2">Q series</td><td>High performance model</td></tr><tr><td>Universal model</td></tr></table>	Q series	High performance model	Universal model																	
	Q series		High performance model																		
		Universal model																			
*Not applicable for QCPU (A mode)																					
Compatible software: GX Works 2 Version 1.31H or later																					
Programming language	Ladder																				
Number of steps (maximum value)	For universal model CPU: 206* *The value is the number of steps in the label program, and is therefore stated as a reference value. For details, refer to the GX Works2 Version1 Operation Manual (Simple Project).																				
Function description	1) By turning ON FB_EN (Execution command), DA output enable/disable setting of the specified channel or all channels is set. 2) When the input value is invalid, the FB_ERROR output turns ON, processing is interrupted, and the error code is stored in ERROR_ID (Error code). Refer to the error code explanation section for details.																				
Compiling method	Macro type																				

Item	Description
Restrictions and precautions	<p>1) The FB does not include error recovery processing. Program the error recovery processing separately in accordance with the required system operation.</p> <p>2) The FB cannot be used in an interrupt program.</p> <p>3) Please ensure that the FB_EN signal is capable of being turned OFF by the program. Do not use this FB in programs that are only executed once such as a subroutine, FOR-NEXT loop, etc. because it is impossible to turn OFF.</p> <p>4) When two or more of these FBs are used, precaution must be taken to avoid repetition of the target channel.</p> <p>5) This FB uses index registers Z9 and Z8. Please do not use these index registers in an interrupt program.</p> <p>6) Every input must be provided with a value for proper FB operation.</p> <p>7) When this FB is used in two or more places, a duplicated coil warning may occur during compile operation due to the Y signal being operated by index modification. However this is not a problem and the FB will operate without error.</p> <p>8) The output range, synchronous output mode, resolution mode, and operation mode must be configured to match devices and systems connected to the Q68DA module. Configure these settings by making the GX Works2 switch setting according to the application.</p> <p>For details on how to use the intelligent function module switch setting, refer to GX Works2 Operating Manual (Common).</p>
FB operation type	Real-time execution
Application example	Refer to Appendix 1 - Application examples.
Timing chart	<div> <p>[When operation completes without error]</p> </div> <div> <p>[When an error occurs]</p> </div>
Relevant manual	Digital-Analog Converter Module User's Manual

Error codes

■ Error code list

Error code	Description
10 (Decimal)	The specified target channel is not valid. The target channel is not within the range of the number of channels of the mounted module.. Please try again after confirming the setting.

Labels

■ Input labels

Name	Label name	Data type	Setting range	Description
Execution command	FB_EN	B	ON, OFF	ON: The FB is activated. OFF: The FB is not activated.
Module start XY address	i_Start_IO_No	W	Depends on the I/O point range. For details, refer to the CPU user's manual.	Specify the starting XY address (in hexadecimal) where the Q68DA module is mounted. (For example, enter H10 for X10.)
Channel No.	i_CH	W	As shown on the right.	Specify the channel number. ■Q68DAV,Q68DAVN,Q68DAI, Q68DAIN: 1~8 ■All channels at once: 15(0FH)
DA output enable/disable setting	i_DA_Out_Enable	B	ON, OFF	ON: Outputs the D/A conversion value. OFF: Outputs the offset value.

■ Output labels

Name	Label name	Data type	Initial value	Description
Execution status	FB_ENO	B	OFF	ON: Execution command is ON. OFF: Execution command is OFF.
Completed without error	FB_OK	B	OFF	When ON, it indicates that DA output enable/disable setting is completed.

Name	Label name	Data type	Initial value	Description
Error flag	FB_ERROR	B	OFF	When ON, it indicates that an error has occurred.
Error code	ERROR_ID	W	0	FB error code output.

FB Version Upgrade History

Version	Date	Description
1.00A	2010/12/10	First edition

Note

This chapter includes information related to the M+Q68DA_SetDAOOutput function block.

It does not include information on restrictions of use such as combination with digital-analog converter modules or programmable controller CPUs.

Before using any Mitsubishi products, please read all the relevant manuals.

5. M+Q68DA_RequestSetting (Operating condition setting request operation)

FB Name
M+Q68DA_RequestSetting

Function Overview

Item	Description			
Function overview	Enables settings of each function.			
Symbol	<div><div><div>Execution command</div><div>Module start XY address</div></div><div><div>M+Q68DA_RequestSetting</div><div><div>B : FB_EN</div><div>W : i_Start_IO_No</div></div></div><div><div>FB_ENO : B</div><div>FB_OK : B</div><div>FB_ERROR : B</div><div>ERROR_ID : W</div></div><div><div>Execution status</div><div>Completed without error</div><div>Error flag</div><div>Error code</div></div></div>			
Applicable hardware and software	Compatible hardware: Q68DAV, Q68DAVN, Q68DAI, Q68DAIN			
	Hardware details			
	<table><tr><td rowspan="2">Q series</td><td>High performance model</td></tr><tr><td>Universal model</td></tr></table>	Q series	High performance model	Universal model
	Q series		High performance model	
		Universal model		
*Not applicable for QCPU (A mode)				
Compatible software: GX Works 2 Version 1.31H or later				
Programming language	Ladder			
Number of steps (maximum value)	For universal model CPU: 143* *The value is the number of steps in the label program, and is therefore stated as a reference value. For details, refer to the GX Works2 Version1 Operation Manual (Simple Project).			
Function description	1) By turning ON FB_EN (Execution command), settings of each function are enabled. 2) The buffer memory is updated by executing the DA conversion enable/disable setting FB/DA output enable/disable setting FB. The set data, however, is not enabled. Execute this FB to enable the settings.			
Compiling method	Macro type			

Item	Description
Restrictions and precautions	<p>1) The FB does not include error recovery processing. Program the error recovery processing separately in accordance with the required system operation.</p> <p>2) The FB cannot be used in an interrupt program.</p> <p>3) Please ensure that the FB_EN signal is capable of being turned OFF by the program. Do not use this FB in programs that are only executed once such as a subroutine, FOR-NEXT loop, etc. because it is impossible to turn OFF.</p> <p>4) When two or more of these FBs are used, precaution must be taken to avoid repetition of the target channel.</p> <p>5) This FB turns ON/OFF the operating condition setting request signal. Please note that the DA conversion is stopped during operation of this FB.</p> <p>6) This FB uses index register Z9. Please do not use this index register in an interrupt program.</p> <p>7) Every input must be provided with a value for proper FB operation.</p> <p>8) When this FB is used in two or more places, a duplicated coil warning may occur during compile operation due to the Y signal being operated by index modification. However this is not a problem and the FB will operate without error.</p> <p>9) The output range, synchronous output mode, resolution mode, and operation mode must be configured to match devices and systems connected to the Q68DA module. Configure these settings by making the GX Works2 switch setting according to the application.</p> <p>For details on how to use the intelligent function module switch setting, refer to GX Works2 Operating Manual (Common).</p>
FB operation type	Pulsed execution (multiple scan execution type)
Application example	Refer to Appendix 1 - Application examples.
Timing chart	<p>The timing chart illustrates the sequence of signals for the FB module. The signals are listed on the left: FB_EN (Execution command), FB_ENO (Execution status), Operating condition setting request (Y signal), Operating condition setting completed flag (X signal), FB_OK (Completed without error), FB_ERR (Error), and ERROR_ID (Error code). The chart shows the timing relationships between these signals during a single execution cycle. FB_EN is a pulsed signal that starts the execution. FB_ENO is a signal that indicates the execution status. The Operating condition setting request (Y signal) is a pulsed signal that is active during the execution. The Operating condition setting completed flag (X signal) is a pulsed signal that is active when the setting is completed. FB_OK is a signal that indicates the completion without error. FB_ERR is a signal that indicates an error. ERROR_ID is a signal that indicates the error code. The chart shows that the execution is completed without error, and the error code is 0.</p>
Relevant manual	Digital-Analog Converter Module User's Manual

Error codes

■ Error code list

Error code	Description
None	No errors are stored for this FB.

Labels

■ Input labels

Name	Label name	Data type	Setting range	Description
Execution command	FB_EN	B	ON, OFF	ON: The FB is activated. OFF: The FB is not activated.
Module start XY address	i_Start_IO_No	W	Depends on the I/O point range. For details, refer to the CPU user's manual.	Specify the starting XY address (in hexadecimal) where the Q68DA module is mounted. (For example, enter H10 for X10.)

■ Output labels

Name	Label name	Data type	Initial value	Description
Execution status	FB_ENO	B	OFF	ON: Execution command is ON. OFF: Execution command is OFF.
Completed without error	FB_OK	B	OFF	When ON, it indicates that the enabled operation of each setting is completed.
Error flag	FB_ERROR	B	OFF	When ON, it indicates that an error has occurred.
Error code	ERROR_ID	W	0	FB error code output.

FB Version Upgrade History

Version	Date	Description
1.00A	2010/12/10	First edition

Note

This chapter includes information related to the M+Q68DA_RequestSetting function block.

It does not include information on restrictions of use such as combination with digital-analog converter modules or programmable controller CPUs.

Before using any Mitsubishi products, please read all the relevant manuals.

6. M+Q68DA_SetOffsetVal (Offset setting)

FB Name

M+Q68DA_SetOffsetVal

Function Overview

Item	Description			
Function overview	Performs offset setting of a specified channel.			
Symbol	<div><div><div>M+Q68DA_SetOffsetVal</div><div><div>Execution command — B : FB_EN</div><div>Module start XY address — W : i_Start_IO_No</div><div>Channel No. — W : i_CH</div><div>Offset adjustment amount — W : i_Adjust_Amount</div><div>Setting value change command — B : i_Value_Change</div><div>User range write command — B : i_Write_Offset</div><div><div>FB_ENO : B — Execution status</div><div>FB_OK : B — Completed without error</div><div>FB_ERROR : B — Error flag</div><div>ERROR_ID : W — Error code</div></div></div></div></div>			
Applicable hardware and software	Compatible hardware: Q68DAV, Q68DAVN, Q68DAI, Q68DAIN			
	Hardware details			
	<table><tr><td rowspan="2">Q series</td><td>High performance model</td></tr><tr><td>Universal model</td></tr></table>	Q series	High performance model	Universal model
	Q series		High performance model	
		Universal model		
*Not applicable for QCPU (A mode)				
Compatible software: GX Works 2 Version 1.31H or later				
Programming language	Ladder			
Number of steps (maximum value)	<p>For universal model CPU: 321*</p> <p>*The value is the number of steps in the label program, and is therefore stated as a reference value. For details, refer to the GX Works2 Version1 Operation Manual (Simple Project).</p>			

Item	Description
Function description	<p>1) By turning ON FB_EN (Execution command), the offset value of the specified channel is set.</p> <p>2) To adjust the D/A output, set i_Adjust_Amount (Offset/gain adjustment amount) and turn OFF i_Value_Change (Setting value change command) and then ON while FB_EN (Execution command) is ON.</p> <p>3) When the input value is invalid, the FB_ERROR output turns ON, processing is interrupted, and the error code is stored in ERROR_ID (Error code). Refer to the error code explanation section for details.</p>
Compiling method	Macro type
Restrictions and precautions	<p>1) The FB does not include error recovery processing. Program the error recovery processing separately in accordance with the required system operation.</p> <p>2) The FB cannot be used in an interrupt program.</p> <p>3) Please ensure that the FB_EN signal is capable of being turned OFF by the program. Do not use this FB in programs that are only executed once such as a subroutine, FOR-NEXT loop, etc. because it is impossible to turn OFF.</p> <p>4) When two or more of these FBs are used, precaution must be taken to avoid repetition of the target channel.</p> <p>5) This FB uses index registers Z9, Z8 and Z7. Please do not use these index registers in an interrupt program.</p> <p>6) Every input must be provided with a value for proper FB operation.</p> <p>7) When this FB is used in two or more places, a duplicated coil warning may occur during compile operation due to the Y signal being operated by index modification. However this is not a problem and the FB will operate without error.</p> <p>8) The output range, synchronous output mode, resolution mode, and operation mode must be configured to match devices and systems connected to the Q68DA module. Configure these settings by making the GX Works2 switch setting according to the application. For details on how to use the intelligent function module switch setting, refer to GX Works2 Operating Manual (Common).</p>
FB operation type	Pulsed execution (multiple scan execution type)
Application example	Refer to Appendix 1 - Application examples.

Item	Description
Timing chart	<p>[When operation completes without error]</p> <p>[When an error occurs]</p>
Relevant manual	Digital-Analog Converter Module User's Manual

Error codes

■ Error code list

Error code	Description
10 (Decimal)	The specified target channel is not valid. The target channel is not within the range of the number of channels of the mounted module.. Please try again after confirming the setting.

Labels

■ Input labels

Name	Label name	Data type	Setting range	Description
Execution command	FB_EN	B	ON, OFF	ON: The FB is activated. OFF: The FB is not activated.
Module start XY address	i_Start_IO_No	W	Depends on the I/O point range. For details, refer to the CPU user's manual.	Specify the starting XY address (in hexadecimal) where the Q68DA module is mounted. (For example, enter H10 for X10.)
Channel No.	i_CH	W	1~8	Specify the channel number.
Offset adjustment amount	i_Adjust_Amount	W	-3000~3000	Set the offset adjustment amount of the specified channel.
Setting value change command	i_Value_Change	B	ON, OFF	Turn ON to change the D/A output. Turn OFF after changing the output.
User range write command	i_Write_Offset	B	ON, OFF	Turn ON to write the adjusted offset value to the flash memory. Turn OFF after writing is completed.

■ Output labels

Name	Label name	Data type	Initial value	Description
Execution status	FB_ENO	B	OFF	ON: Execution command is ON. OFF: Execution command is OFF.
Completed without error	FB_OK	B	OFF	When ON, it indicates that the offset setting of the specified channel is completed.
Error flag	FB_ERROR	B	OFF	When ON, it indicates that an error has occurred.
Error code	ERROR_ID	W	0	FB error code output.

FB Version Upgrade History

Version	Date	Description
1.00A	2010/12/10	First edition

Note

This chapter includes information related to the M+Q68DA_SetOffsetVal function block.

It does not include information on restrictions of use such as combination with digital-analog converter modules or programmable controller CPUs.

Before using any Mitsubishi products, please read all the relevant manuals.

7. M+Q68DA_SetGainVal (Gain setting)

FB Name

M+Q68DA_SetGainVal

Function Overview

Item	Description	
Function overview	Performs gain setting of a specified channel.	
Symbol	<div><div><div>Execution command</div><div>Module start XY address</div><div>Channel No.</div><div>Gain adjustment amount</div><div>Setting value change command</div><div>User range write command</div></div><div><div>M+Q68DA_SetGainVal</div><div><div>B : FB_EN</div><div>W : i_Start_IO_No</div><div>W : i_CH</div><div>W : i_Adjust_Amount</div><div>B : i_Value_Change</div><div>B : i_Write_Gain</div></div></div><div><div>FB_ENO : B</div><div>FB_OK : B</div><div>FB_ERROR : B</div><div>ERROR_ID : W</div></div><div><div>Execution status</div><div>Completed without error</div><div>Error flag</div><div>Error code</div></div></div>	
Applicable hardware and software	Compatible hardware: Q68DAV, Q68DAVN, Q68DAI, Q68DAIN	
	Hardware details	
	Q series	<div>High performance model</div> <div>Universal model</div>
	*Not applicable for QCPU (A mode)	
	Compatible software: GX Works 2 Version 1.31H or later	
Programming language	Ladder	
Number of steps (maximum value)	<div>For universal model CPU: 318*</div> <div>*The value is the number of steps in the label program, and is therefore stated as a reference value. For details, refer to the GX Works2 Version1 Operation Manual (Simple Project).</div>	

Item	Description
Function description	<p>1) By turning ON FB_EN (Execution command), the gain value of the specified channel is set.</p> <p>2) To adjust the D/A output, set i_Adjust_Amount (Offset/gain adjustment amount) and turn OFF i_Value_Change (Setting value change command) and then ON while FB_EN (Execution command) is ON.</p> <p>3) When the input value is invalid, the FB_ERROR output turns ON, processing is interrupted, and the error code is stored in ERROR_ID (Error code). Refer to the error code explanation section for details.</p>
Compiling method	Macro type
Restrictions and precautions	<p>1) The FB does not include error recovery processing. Program the error recovery processing separately in accordance with the required system operation.</p> <p>2) The FB cannot be used in an interrupt program.</p> <p>3) Please ensure that the FB_EN signal is capable of being turned OFF by the program. Do not use this FB in programs that are only executed once such as a subroutine, FOR-NEXT loop, etc. because it is impossible to turn OFF.</p> <p>4) When two or more of these FBs are used, precaution must be taken to avoid repetition of the target channel.</p> <p>5) This FB uses index registers Z9, Z8 and Z7. Please do not use these index registers in an interrupt program.</p> <p>6) Every input must be provided with a value for proper FB operation.</p> <p>7) When this FB is used in two or more places, a duplicated coil warning may occur during compile operation due to the Y signal being operated by index modification. However this is not a problem and the FB will operate without error.</p> <p>8) The output range, synchronous output mode, resolution mode, and operation mode must be configured to match devices and systems connected to the Q68DA module. Configure these settings by making the GX Works2 switch setting according to the application. For details on how to use the intelligent function module switch setting, refer to GX Works2 Operating Manual (Common).</p>
FB operation type	Pulsed execution (multiple scan execution type)
Application example	Refer to Appendix 1 - Application examples.

Item	Description
Timing chart	<p>[When operation completes without error]</p> <p>[When an error occurs]</p>
Relevant manual	Digital-Analog Converter Module User's Manual

Error codes

■ Error code list

Error code	Description
10 (Decimal)	The specified target channel is not valid. The target channel is not within the range of the number of channels of the mounted module.. Please try again after confirming the setting.

Labels

■ Input labels

Name	Label name	Data type	Setting range	Description
Execution command	FB_EN	B	ON, OFF	ON: The FB is activated. OFF: The FB is not activated.
Module start XY address	i_Start_IO_No	W	Depends on the I/O point range. For details, refer to the CPU user's manual.	Specify the starting XY address (in hexadecimal) where the Q68DA module is mounted. (For example, enter H10 for X10.)
Channel No.	i_CH	W	1~8	Specify the channel number.
Gain adjustment amount	i_Adjust_Amount	W	-3000~3000	Specify the gain adjustment amount of the specified channel.
Setting value change command	i_Value_Change	B	ON, OFF	Turn ON to change the D/A output. Turn OFF after changing the output.
User range write command	i_Write_Gain	B	ON, OFF	Turn ON to write the adjusted gain value to the flash memory. Turn OFF after writing is completed.

■ Output labels

Name	Label name	Data type	Initial value	Description
Execution status	FB_ENO	B	OFF	ON: Execution command is ON. OFF: Execution command is OFF.
Completed without error	FB_OK	B	OFF	When ON, it indicates that the gain setting of the specified channel is completed.
Error flag	FB_ERROR	B	OFF	When ON, it indicates that an error has occurred.
Error code	ERROR_ID	W	0	FB error code output.

FB Version Upgrade History

Version	Date	Description
1.00A	2010/12/10	First edition

Note

This chapter includes information related to the M+Q68DA_SetGainVal function block.

It does not include information on restrictions of use such as combination with digital-analog converter modules or programmable controller CPUs.

Before using any Mitsubishi products, please read all the relevant manuals.

8. M+Q68DA_ErrorOperation (Error operation)

FB Name
M+Q68DA_ErrorOperation

Function Overview

Item	Description			
Function overview	Monitors error codes and performs error reset.			
Symbol	<div><div><div>M+Q68DA_ErrorOperation</div><div><div>Execution command</div><div>B : FB_EN</div></div><div><div>Module start XY address</div><div>W : i_Start_IO_No</div></div><div><div>Error reset request</div><div>B : i_ErrorReset</div></div><div><div>FB_ENO : B</div><div>Execution status</div></div><div><div>FB_OK : B</div><div>Completed without error</div></div><div><div>o_UNIT_ERROR : B</div><div>Module error</div></div><div><div>o_UNIT_ERR_CODE : W</div><div>Module error code</div></div><div><div>FB_ERROR : B</div><div>Error flag</div></div><div><div>ERROR_ID : W</div><div>Error code</div></div></div></div>			
Applicable hardware and software	Compatible hardware: Q68DAV, Q68DAVN, Q68DAI, Q68DAIN			
	Hardware details			
	<table><tr><td rowspan="2">Q series</td><td>High performance model</td></tr><tr><td>Universal model</td></tr></table>	Q series	High performance model	Universal model
	Q series		High performance model	
		Universal model		
*Not applicable for QCPU (A mode)				
Compatible software: GX Works 2 Version 1.31H or later				
Programming language	Ladder			
Number of steps (maximum value)	For universal model CPU: 195* *The value is the number of steps in the label program, and is therefore stated as a reference value. For details, refer to the GX Works2 Version1 Operation Manual (Simple Project).			
Function description	1) By turning ON FB_EN (Execution command), error information is read. 2) When the error reset request is ON, error clear is performed.			
Compiling method	Macro type			

Item	Description
Restrictions and precautions	<p>1) The FB does not include error recovery processing. Program the error recovery processing separately in accordance with the required system operation.</p> <p>2) The FB cannot be used in an interrupt program.</p> <p>3) Please ensure that the FB_EN signal is capable of being turned OFF by the program. Do not use this FB in programs that are only executed once such as a subroutine, FOR-NEXT loop, etc. because it is impossible to turn OFF.</p> <p>4) This FB uses index registers Z9 and Z8. Please do not use these index registers in an interrupt program.</p> <p>5) Every input must be provided with a value for proper FB operation.</p> <p>6) When this FB is used in two or more places, a duplicated coil warning will occur during compile operation due to the Y signal being operated by index modification. However this is not a problem and the FB will operate without error.</p> <p>7) The output range, synchronous output mode, resolution mode, and operation mode must be configured to match devices and systems connected to the Q68DA module. Configure these settings by making the GX Works2 switch setting according to the application.</p> <p>For details on how to use the intelligent function module switch setting, refer to GX Works2 Operating Manual (Common).</p>
FB operation type	Real-time execution
Application example	Refer to Appendix 1 - Application examples.
Timing chart	<p>The timing chart illustrates the operational sequence of the FB module. It shows the relationship between various input and output signals over time. Key events include the execution command (FB_EN) being triggered, the module error (o_UNIT_ERROR) being set, the error code (o_UNIT_ERR_CODE) being output, and the error reset (i_ErrorReset) being requested. The chart also shows the completion of the module (FB_OK) and the output of the error code (ERROR_IDX).</p>
Relevant manual	Digital-Analog Converter Module User's Manual

Error codes

■ Error code list

Error code	Description
None	No errors are stored for this FB.

Labels

■ Input labels

Name	Label name	Data type	Setting range	Description
Execution command	FB_EN	B	ON, OFF	ON: The FB is activated. OFF: The FB is not activated.
Module start XY address	i_Start_IO_No	W	Depends on the I/O point range. For details, refer to the CPU user's manual.	Specify the starting XY address (in hexadecimal) where the Q68DA module is mounted. (For example, enter H10 for X10.)
Error reset request	i_ErrorReset	B	ON, OFF	Turn ON to perform the error reset. Turn OFF after error reset is completed.

■ Output labels

Name	Label name	Data type	Initial value	Description
Execution status	FB_ENO	B	OFF	ON: Execution command is ON. (Module error being monitored) OFF: Execution command is OFF.
Completed without error	FB_OK	B	OFF	When ON, it indicates executing the error reset command is completed.
Module error	o_UNIT_ERR_OR	B	OFF	When ON, it indicates a module error has occurred.
Module error code	o_UNIT_ERR_CODE	W	0	Store a code for an error occurring.
Error flag	FB_ERROR	B	OFF	When ON, it indicates that an error has occurred.
Error code	ERROR_ID	W	0	FB error code output.

FB Version Upgrade History

Version	Date	Description
1.00A	2010/12/10	First edition

Note

This chapter includes information related to the M+Q68DA_ErrorOperation function block.

It does not include information on restrictions of use such as combination with digital-analog converter modules or programmable controller CPUs.

Before using any Mitsubishi products, please read all the relevant manuals.

Appendix 1 - Application examples

Q68DA application examples

System configuration

Power supply module	CPU Module	Q68DA (X/Y00~X/Y0F)	QX40 (X10~X1F)	QY40 (Y20~Y2F)
----------------------------	-------------------	-------------------------------	--------------------------	--------------------------

Device list

External input (commands)

Device	FB function name	Application (ON details)
X10	Error operation	Error reset request

External output (checks)

Device	FB function name	Application (ON details)
Y20	DA conversion data write	DA conversion data write FB error
Y21	DA conversion data write (All CHs)	DA conversion data write (All CHs) FB error
Y22	DA conversion enable/disable setting	DA conversion enable/disable FB error
Y23	DA output enable/disable setting	DA output enable/disable FB error
Y24	Operating condition setting request operation	Operating condition setting request operation FB error
Y25	Offset setting	Offset setting FB error
Y26	Gain setting	Gain setting FB error
Y27	Error operation	Module error
Y28		Error operation FB error


Data register

Device	FB function name	Application (ON details)
D0	DA conversion data write	DA conversion data write FB error code
D1	DA conversion data write (All CHs)	DA conversion data write (All CHs) FB error code
D2	DA conversion enable/disable setting	DA output enable/disable FB error code
D3	DA output enable/disable setting	DA conversion enable/disable FB error code
D4	Operating condition setting request operation	Operating condition setting request operation FB error code
D5	Offset setting	Offset setting FB error code
D6	Gain setting	Gain setting FB error code
D7	Error operation	Error operation FB error code
D8		Module error code


Relay


Device	FB function name	Application (ON details)
M0		DA conversion data write request
M1	DA conversion data write	DA conversion data write FB ready
M2		DA conversion data write complete
M3		DA conversion data write (All CHs) request
M4	DA conversion data write (All CHs)	DA conversion data write (All CHs) FB ready
M5		DA conversion data write (All CHs) complete
M6	DA conversion enable/disable setting	DA conversion enable/disable setting request
M7		DA conversion enable/disable setting
M8		DA conversion enable/disable setting FB ready
M9		DA conversion enable/disable setting complete
M10	DA output enable/disable setting	DA output enable/disable setting request
M11		DA output enable/disable setting
M12		DA output enable/disable setting FB ready
M13		DA output enable/disable setting complete
M14	Operating condition setting request operation	Operating condition setting request
M15		Operating condition setting request FB ready
M16		Operating condition setting request operation FB complete
M17	Offset setting	Offset setting request
M18		Setting value change command
M19		User range write command
M20		Offset setting FB ready
M21	Gain setting	Offset setting complete
M22		Gain setting request
M23		Setting value change command
M24		User range write command
M25		Gain setting FB ready
M26		Gain setting complete
M27	Error operation	Error operation request
M28		Error operation ready
M29		Error operation complete

M+Q68DA_WriteDAVal (DA conversion data write)

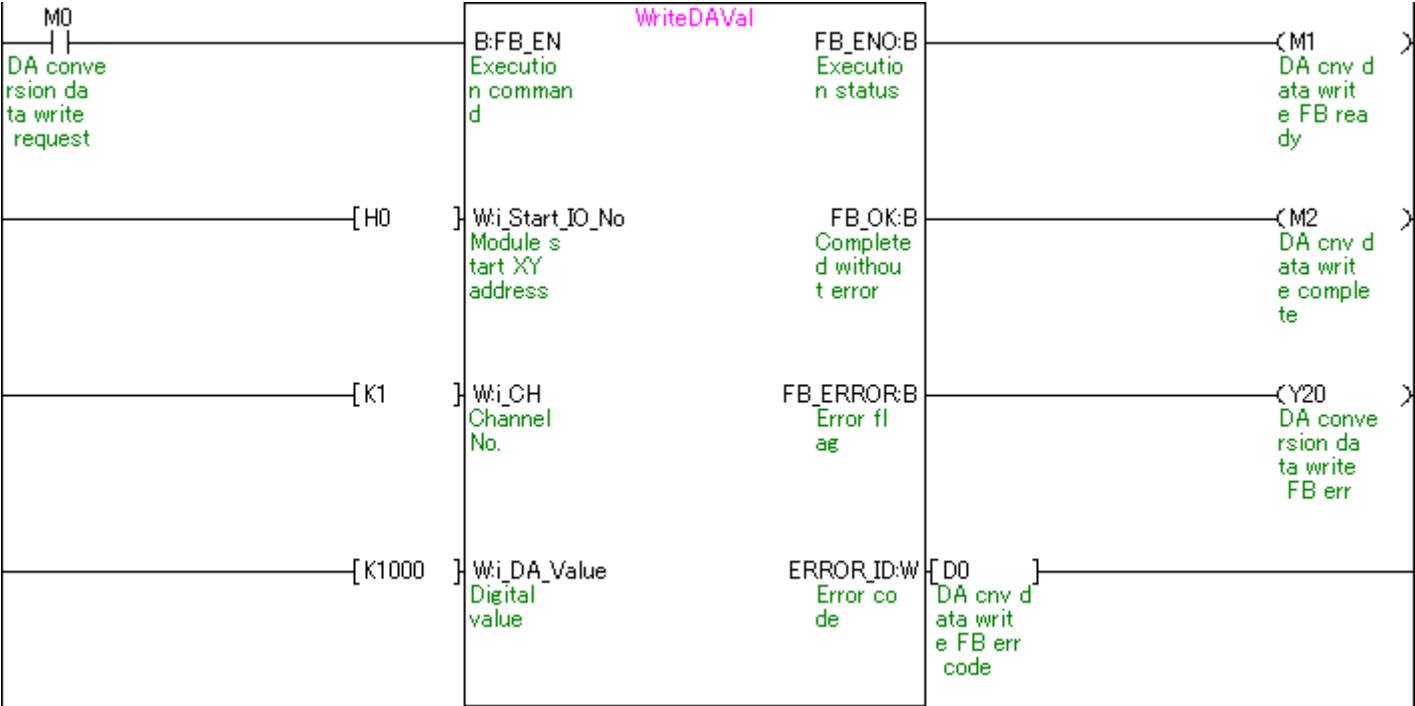


M+Q68DA_WriteAIIDAVal (DA conversion data write (All CHs))

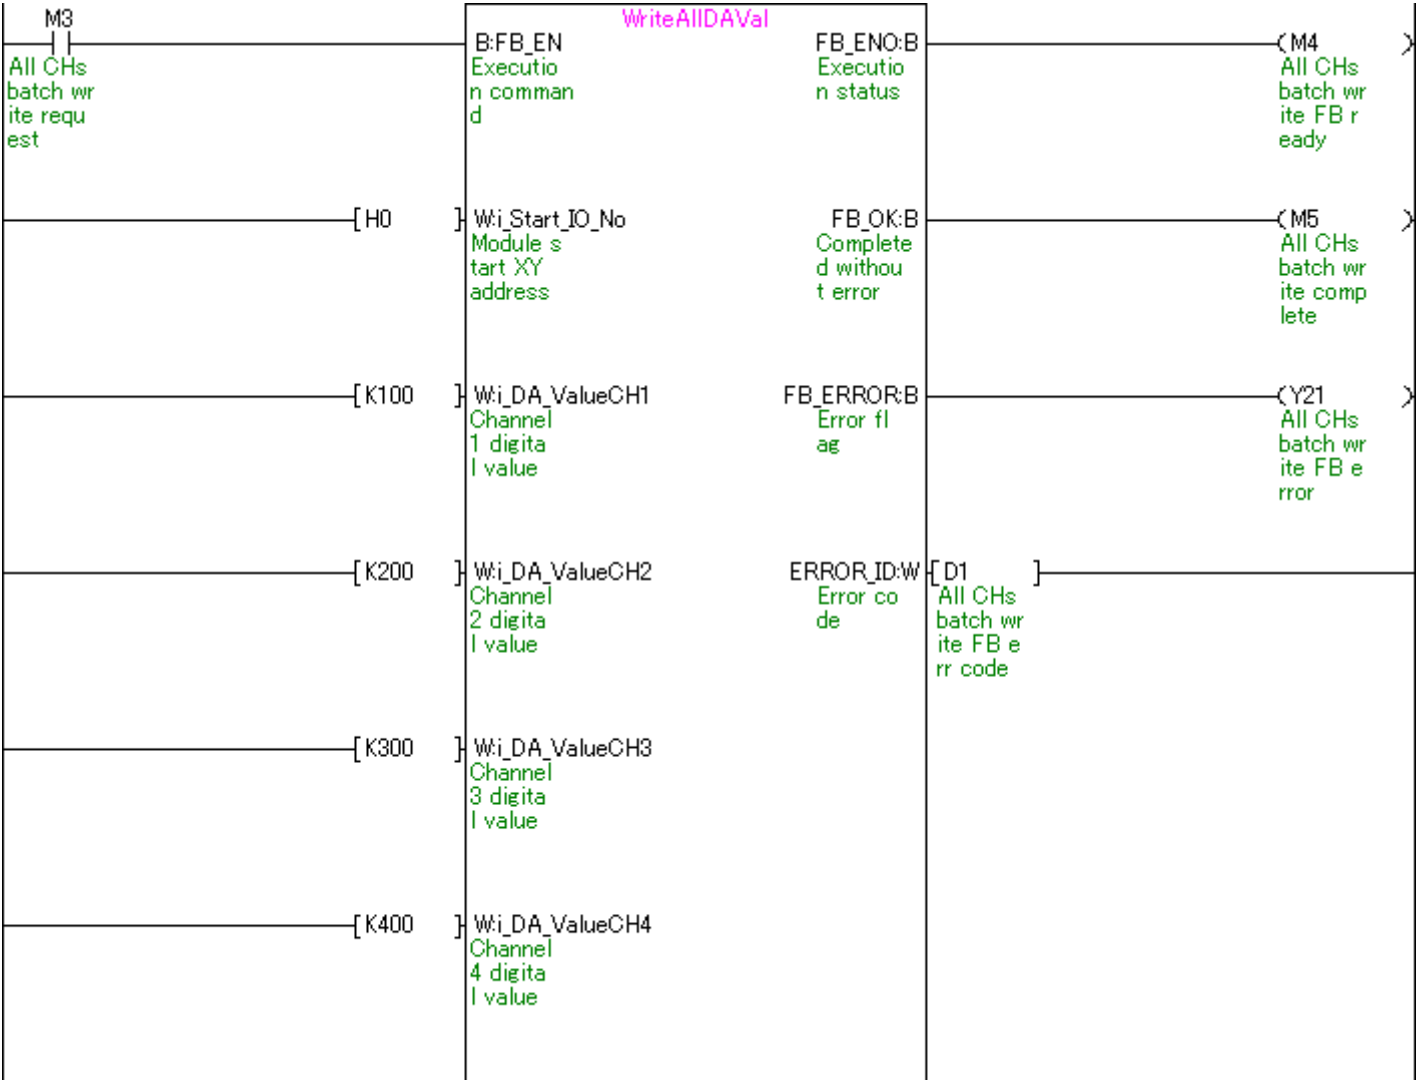


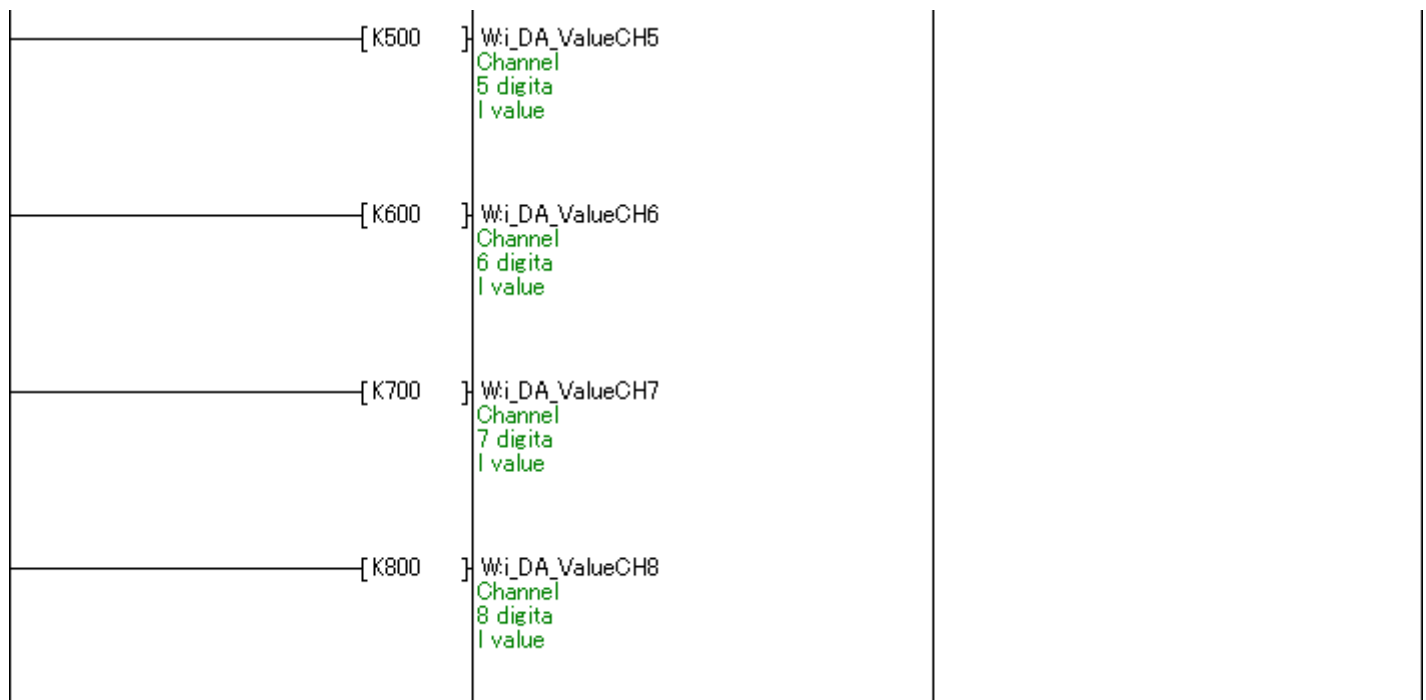


M+Q68DA_SetDAConversion (DA conversion enable/disable setting)

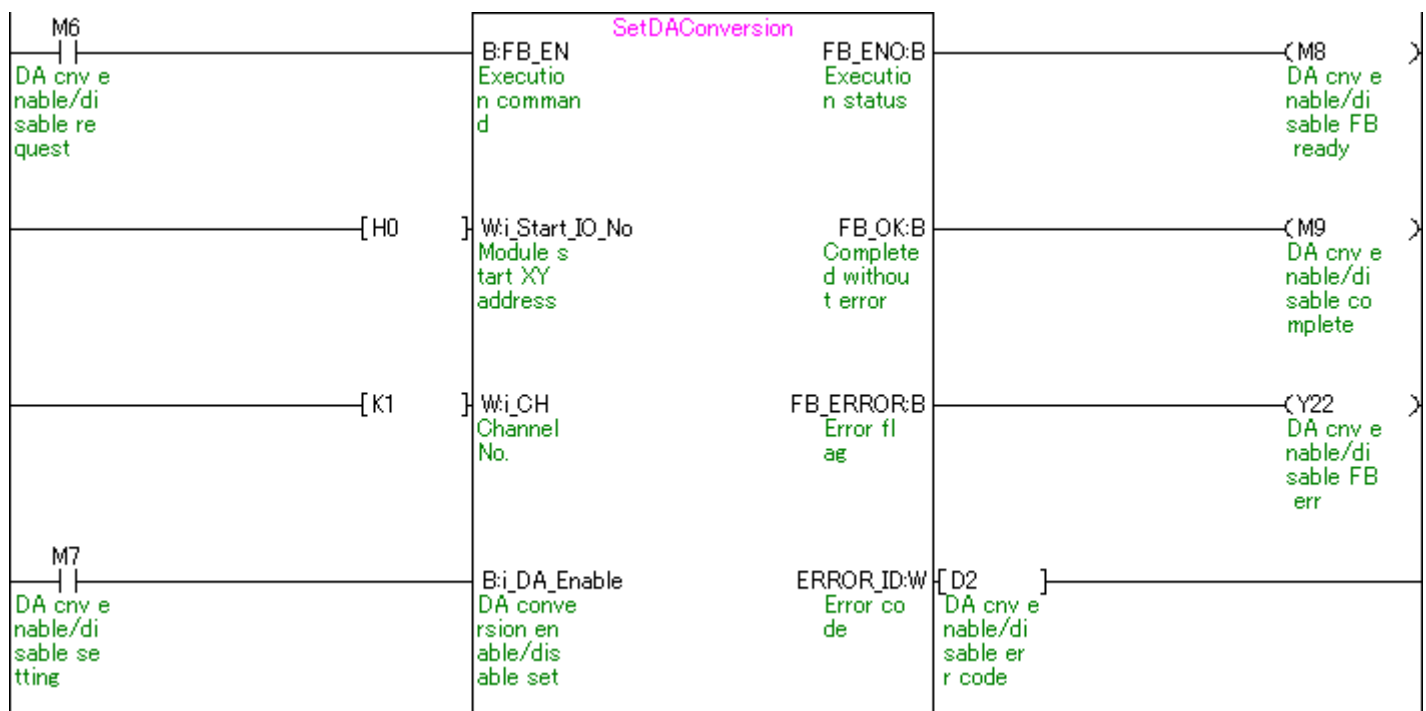


M+Q68DA_SetDAOOutput (DA output enable/disable setting)

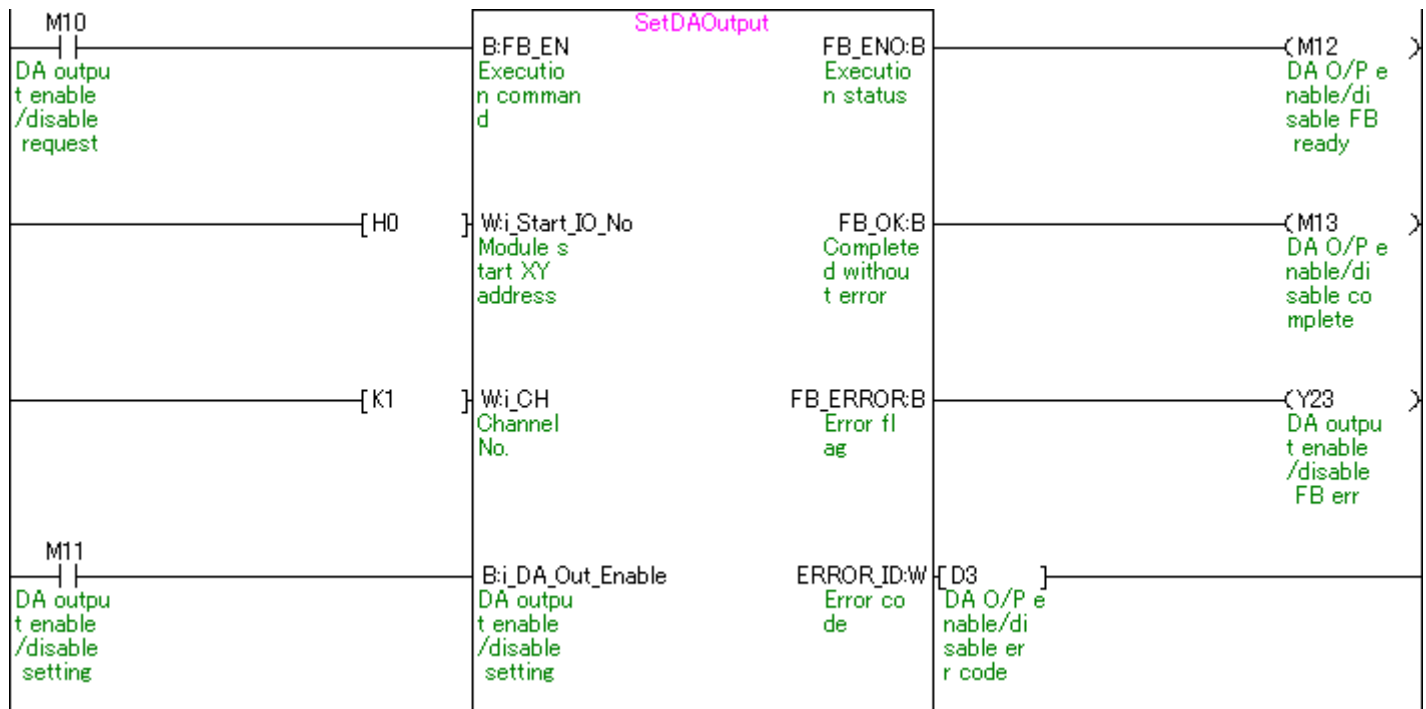


M+Q68DA_RequestSetting (Operating condition setting request operation)

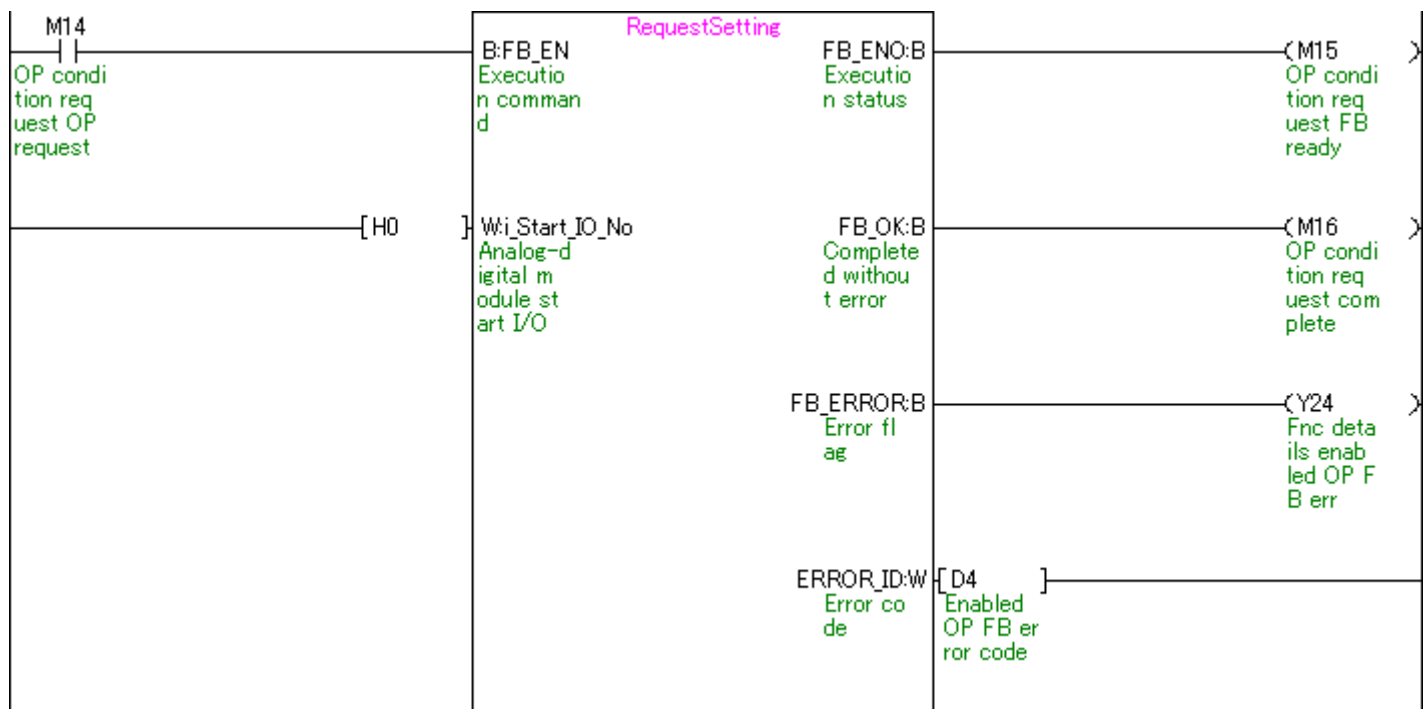

M+Q68DA_SetOffsetVal (Offset setting)

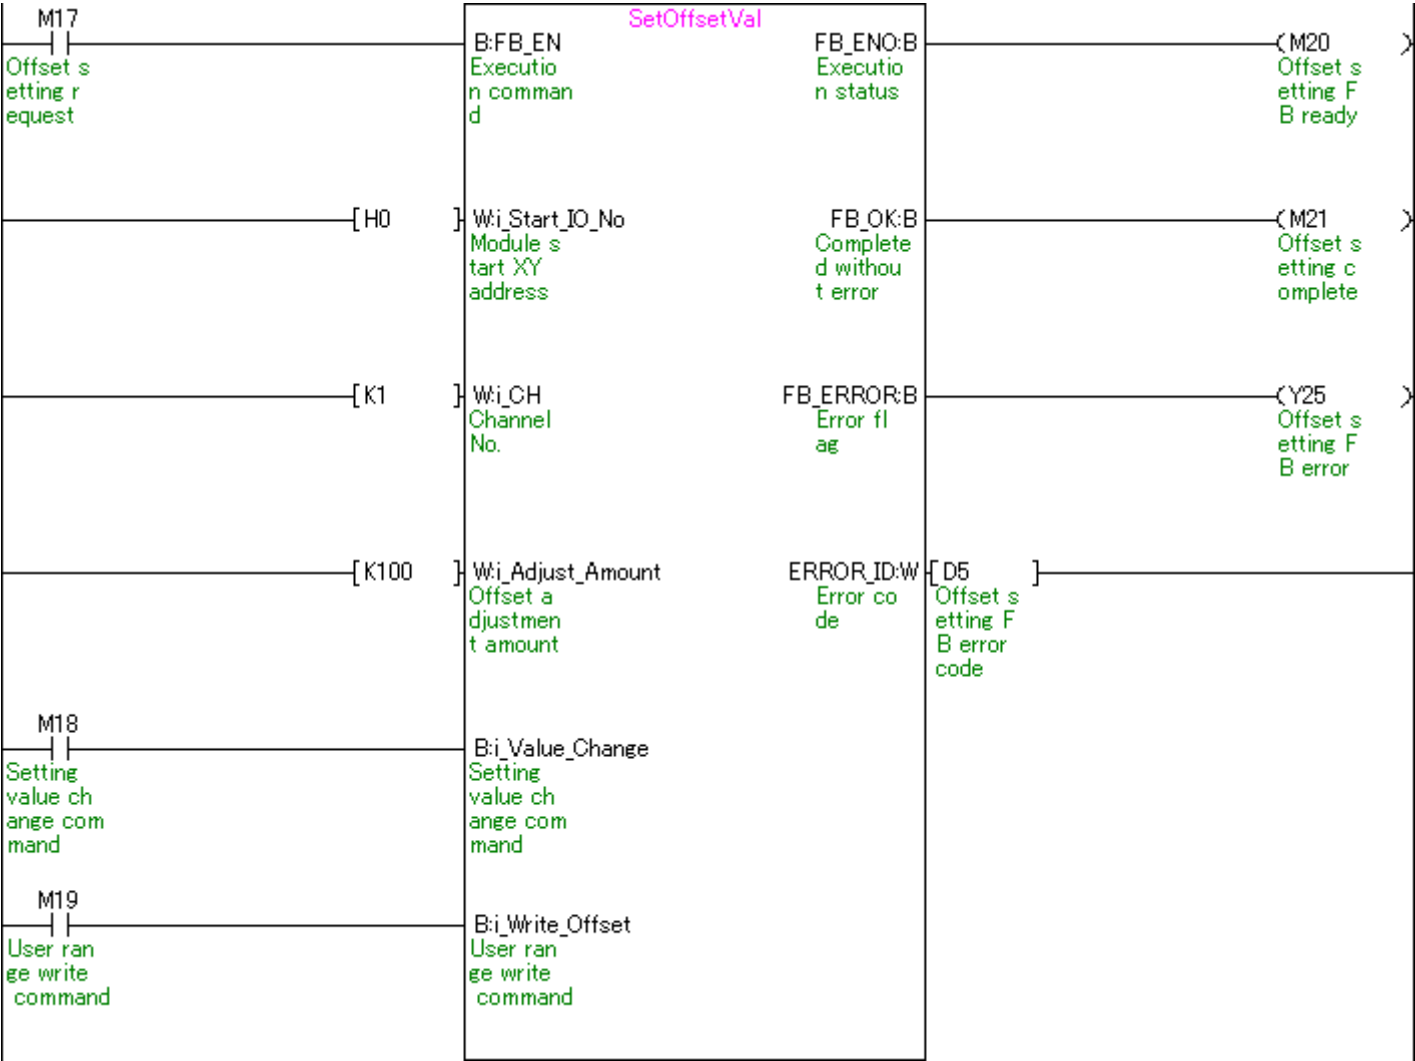

M+Q68DA_SetGainVal (Gain setting)

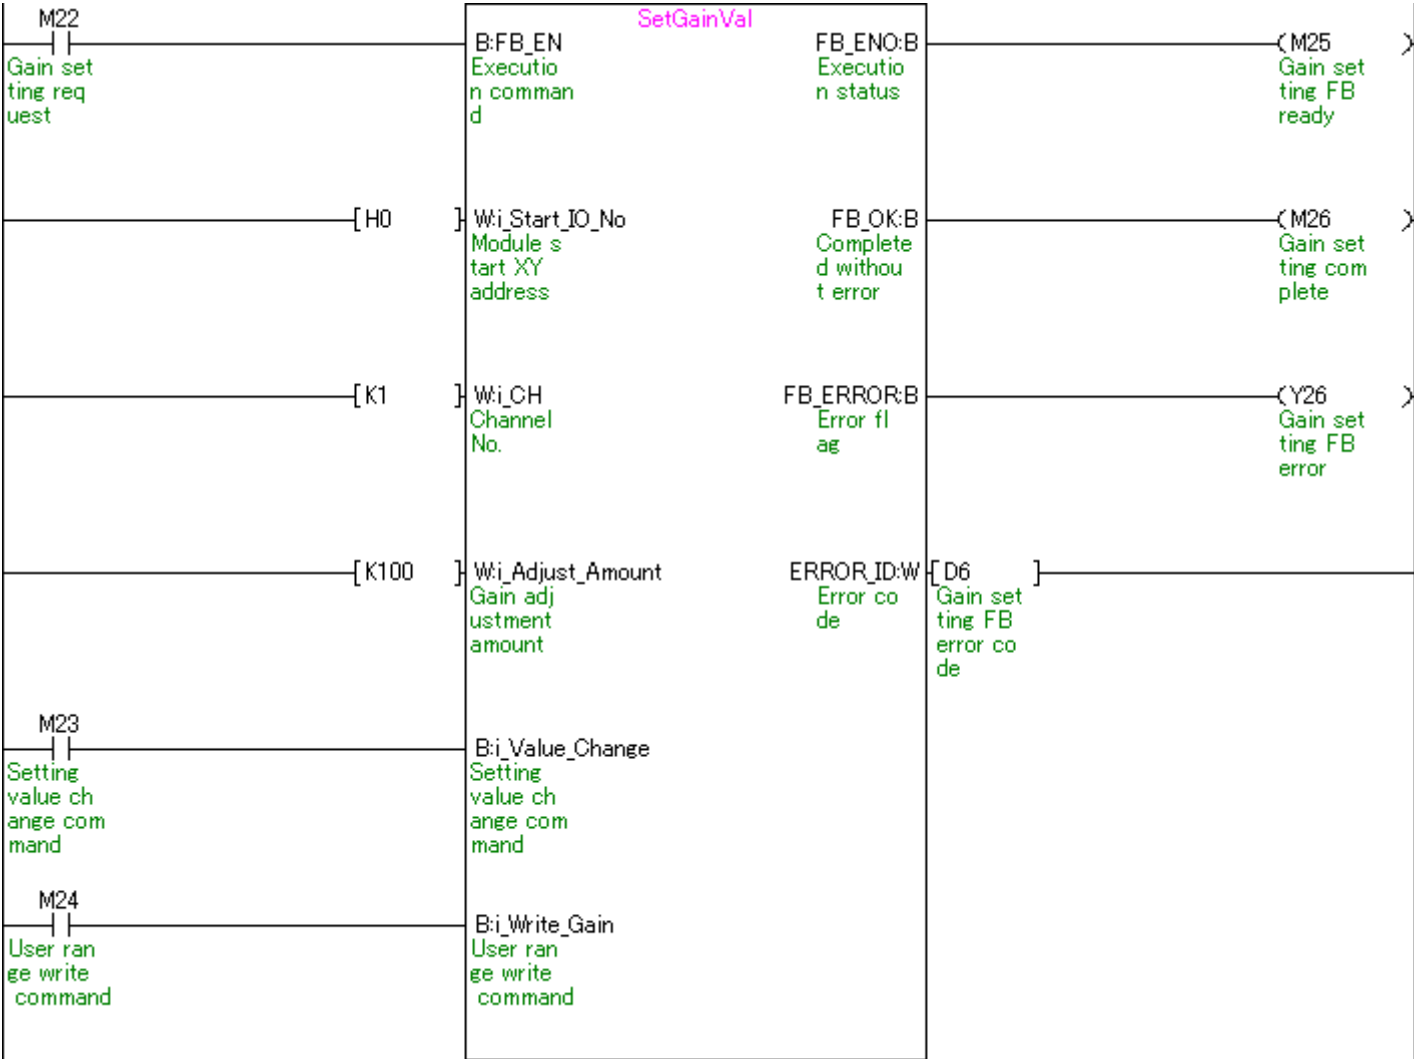

M+Q68DA_ ErrorOperation (Error operation)

